


DIN-Rail Embedded Controller (MEC)

Datasheet

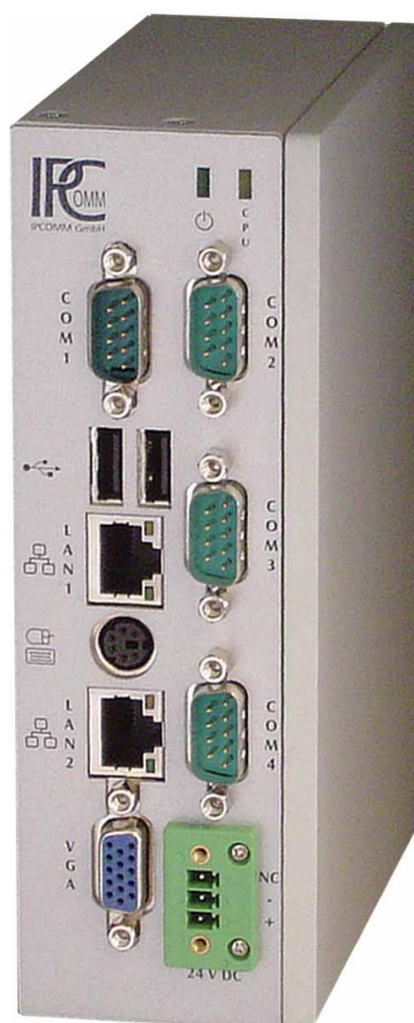

IPCOMM GmbH

Gundstraße 15
91056 Erlangen
Germany

Phone: +49 9131 92076-0
Fax: +49 9131 92076-10
Internet: <http://www.ipcomm.de>
Email: info@ipcomm.de

Edition May 2012
Version 1.1.2



DIN EN ISO 9001:2008
Zertifikat: 01 100 040757

Technical Data

General

- No rotating parts

Processor

- AMD LX800 500 MHz processor, fanless

Dynamic Memory

- DDR RAM, max. 1024 MByte, SO-DIMM

System I/O Outlet

- 1 x 9-pin D-SUB male for RS232/422/485
- 3 x 9-pin D-SUB male for RS232
- 1 x Compact Flash socket
- 1 x PS/2 mouse and keyboard interface
- 2 x LAN RJ-45 for 10/100Base-T
- 2 x USB
- 1 x 15-pin D-SUB female for VGA

Diagnostic LEDs

- Power
- Software state (CPU-LED)
- Link and activity for LAN interfaces

Mass storage

- Rugged CompactFlash, Industrial – Grade
- Removable flash card
- No moving parts
- Max. 8 GB storage capacity supported
- Shock: 1000 G max.
- MTBF >1.000.000 hours
- Bad Block Scanning/Handling
- Static Wear-Leveling System
- 6-Bit ECC
- 2.000.000 write/erase cycles

Additional Functions

- Battery buffered real time clock (RTC)
- Watchdog

Power consumption

- 24 V DC / 9 W max.¹⁾

Standards

- CE

Housing

- Aluminum and steel chassis, including clip for mounting on a 35 mm DIN-Rail
- Protection class: IP50

Dimensions (without clip)

- 50x160x111mm (W/H/D)

Weight

- 1 kg

Operating Environment

- Operating temperature /storage temperature: -10°C – 50°C / -10°C - 70°C
- Relative humidity: 5 % to 90 % non-condensing

¹⁾ Voltage and power data depend on the used type

Note: Differences to the delivered type are possible.